
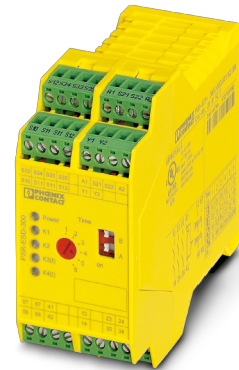


PSR-...-24DC/ESD/5X1/1X2/300



Safety relay for emergency stop, safety door and light grid monitoring with adjustable delay time

Data sheet
102104_en_05

© Phoenix Contact

2023-11-16

1 Description

Intended Use

The safety relay is used for emergency stop, safety door, and light grid monitoring.

The safety relay interrupts circuits in a safety-related way.

Possible signal generators

- Emergency stop button
- Door locking mechanisms
- Light grids

Contact switching type

- 3 undelayed enabling current paths
- 2 delayed enabling current paths
- 1 non-delayed signaling current path

The undelayed enabling current paths and the signaling current path drop out as per stop category 0 in accordance with EN 60204-1.

The delayed enabling current paths drop out as per stop category 1 in accordance with EN 60204-1.

Control

- Single or two channel
- Automatic or manual, monitored start

Achievable safety integrity

- Undelayed contacts suitable up to category 4, PL e (EN ISO 13849-1), SIL 3 (EN IEC 62061)
- Dropout delayed contacts suitable up to category 3, PL d (EN ISO 13849-1), SILCL 2 (EN IEC 62061)

Additional features

- Adjustable delay time (0.2 s ... 300 s, 24 increments)
- Cross circuiting detection
- Optional pluggable screw or Push-in terminal blocks
- 45 mm housing width

Approvals



WARNING: Risk of electric shock

Observe the safety regulations and installation notes in the corresponding section.



Make sure you always use the latest documentation.

It can be downloaded from the product at phoenixcontact.com/products.



This document is valid for the products listed in the "Ordering data" chapter.

This document meets the same requirements as the original operating instructions with respect to the contents.

2 Table of contents

1	Description	1
2	Table of contents	2
3	Ordering data	3
4	Technical data	4
5	Safety regulations and installation notes.....	9
6	Function description	10
7	Function and time diagrams	10
8	Block diagram.....	11
9	Derating	11
10	Load limit curve	11
11	Operating and indication elements	12
12	Mounting and removing	13
13	Wiring	13
14	Startup	15
15	Configuration	16
16	Calculating the power dissipation	17
17	Function test/proof test	17
18	Application examples	18
19	Attachment	22

3 Ordering data

Description	Type	Item no.	Pcs./Pkt.
Safety relay for emergency stop and safety door monitoring up to SIL 3 or Cat. 4, PL e (EN ISO 13849), one- or two-channel operation, automatic or manual activation, 3 N/O contacts, 1 N/C contact, 2 N/O contacts with dropout delay of 0.2 s ... 300 s, plug-in screw terminal block	PSR-SCP-24DC/ESD/5X1/1X2/300	2981428	1
Safety relay for emergency stop and safety door monitoring up to SIL 3 or Cat. 4, PL e (EN ISO 13849), one- or two-channel operation, automatic or manual activation, 3 N/O contacts, 1 N/C contact, 2 N/O contacts with dropout delay of 0.2 s ... 300 s, pluggable Push-in terminal block	PSR-SPP-24DC/ESD/5X1/1X2/300	2981431	1

4 Technical data

Hardware/firmware version

HW/FW $\geq 09/--$

The technical data and safety characteristics are valid as of the specified HW/FW version.

Input data

Rated control circuit supply voltage U_S	24 V DC -15 % / +10 %
Rated control supply current I_S	typ. 155 mA
Inrush current	200 mA (at U_S) < 40 mA (with U_S/I_x to S10) < 150 mA (with U_S/I_x to S12) > -60 mA (with U_S/I_x to S22) < 40 mA (with U_S/I_x to S34) < 40 mA (with U_S/I_x to S35)
Current consumption	< 40 mA (with U_S/I_x to S10) < 50 mA (with U_S/I_x to S12) > -40 mA (with U_S/I_x to S22) 0 mA (with U_S/I_x to S34) < 5 mA (with U_S/I_x to S35)
Power consumption at U_S	typ. 3.72 W
Filter time	1 ms (at A1 in the event of voltage dips at U_S) max. 1.5 ms (at S10, S12; test pulse width) 7.5 ms (at S10, S12; test pulse rate) Test pulse rate = 5 x Test pulse width
Voltage at input/start and feedback circuit	24 V DC -15 % / +10 %
Max. permissible overall conductor resistance (Input and reset circuit at U_S)	approx. 22 Ω (Input and start circuits at U_S)
Typical response time at U_S	< 600 ms (automatic start) < 70 ms (manual start)
Typical starting time with U_S	< 600 ms (when controlled via A1)
Typical release time with U_S	< 20 ms (when controlled via S11/S12 and S21/S22) < 20 ms (when controlled via A1)
Delay time range	0.2 s ... 300 s ± 20 % (K3(t), K4(t) can be parameterized)
Recovery time	< 1 s
Maximum switching frequency	0.5 Hz
Concurrence	∞
Operating voltage display	1 x green LED
Status display	4 x green LEDs
Protective circuit	Surge protection Suppressor diode

Output data	
Contact switching type	5 enabling current paths 1 signaling current path
Contact material	AgSnO ₂
Minimum switching voltage	5 V AC/DC
Maximum switching voltage	250 V AC/DC (Observe the load curve)
Limiting continuous current	6 A (N/O contact, pay attention to the derating) 6 A (N/C contact)
Maximum inrush current	20 A ($\Delta t \leq 100$ ms, undelayed contacts) 8 A (delayed contacts)
Inrush current, minimum	10 mA
Sq. Total current $I_{TH}^2 = I_1^2 + I_2^2 + \dots + I_N^2$	55 A ² (observe derating)
Interrupting rating (ohmic load) max.	144 W (24 V DC, $\tau = 0$ ms) 288 W (48 V DC, $\tau = 0$ ms) 110 W (110 V DC, $\tau = 0$ ms, delayed contacts: 77 W) 88 W (220 V DC, $\tau = 0$ ms) 1500 VA (250 V AC, $\tau = 0$ ms, delayed contacts: 2000 VA)
Maximum interrupting rating (inductive load)	42 W (24 V DC, $\tau = 40$ ms, delayed contacts: 48 W) 42 W (48 V DC, $\tau = 40$ ms, delayed contacts: 40 W) 42 W (110 V DC, $\tau = 40$ ms, delayed contacts: 35 W) 42 W (220 V DC, $\tau = 40$ ms, delayed contacts: 33 W)
Switching capacity min.	50 mW
Mechanical service life	10x 10 ⁶ cycles
Switching capacity (360/h cycles)	4 A (24 V DC) 4 A (230 V AC)
Switching capacity (3600/h cycles)	2.5 A (24 V (DC13)) 3 A (230 V (AC15))
Output fuse	10 A gL/gG (N/O contact) 6 A gL/gG (N/C contact)

General data		
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3	
Nominal operating mode	100% operating factor	
Degree of protection	IP20	
Min. degree of protection of inst. location	IP54	
Mounting type	DIN rail mounting	
Mounting position	any	
Weight	430 g	
Type of housing	Polyamide	
Operating voltage display	1 x green LED	
Status display	4 x green LEDs	
Air clearances and creepage distances between the power circuits	according to IEC 60664-1	
Rated insulation voltage	250 V AC	
Rated surge voltage/insulation	Basic insulation 4 kV: between all current paths and housing Safe isolation, reinforced insulation 6 kV: between 13/14, 23/24, 33/34, and the remaining current paths between 13/14, 23/24, 33/34 among one another	
Degree of pollution	2	
Overvoltage category	III	
Dimensions	Screw connection	Push-in connection
W x H x D	45 x 99 x 114.5 mm	45 x 112 x 114.5 mm
Connection data	Screw connection	Push-in connection
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²	0.2 mm ² ... 1.5 mm ²
Conductor cross-section AWG	24 ... 12	24 ... 16
Stripping length	7 mm	8 mm
Screw thread	M3	
Ambient conditions		
Ambient temperature (operation)	-20 °C ... 55 °C (observe derating)	
Ambient temperature (storage/transport)	-40 °C ... 70 °C	
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)	
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)	
Maximum altitude	≤ 2000 m (Above sea level)	
Information on operating height	See the "Using PSR devices at altitudes greater than 2000 m above sea level" section	
Shock	15g	
Vibration (operation)	10 Hz ... 150 Hz, 2g	

Conformance/Approvals

Conformance CE-compliant

The full EC Declaration of Conformity can be downloaded for the product at phoenixcontact.com/products.

Approvals

**Safety data**

Stop category according to IEC 60204 0 (Undelayed contacts)
1 (delayed contacts)

Safety parameters in accordance with IEC 61508 - high demand

IEC 61508 - High demand

Equipment type	Type A
HFT	1
SIL	3 (for delayed contacts SIL 2)
PFH _D	1.89×10^{-9}
Demand rate	< 12 Months
Proof test interval	240 Months
Duration of use	240 Months

The specifications apply assuming the following calculation basis

B _{10D}	230000 (At 3 A AC15)
d _{op}	365.25 Days
h _{op}	24 h
t _{Cycle}	3600 s

Safety technology parameters according to IEC 61508 - low demand

IEC 61508 - Low demand

Equipment type	Type A
HFT	1
SIL	3 (for delayed contacts SIL 2)
PFD _{avg}	1.43×10^{-4}
Proof test interval	19 Months
Duration of use	240 Months

Safety parameters according to EN ISO 13849-1

Category 4 (Undelayed contacts)
3 (delayed contacts)

Performance level e (for delayed contacts PL d)

Duration of use 240 Months

For applications in PL e, the required demand rate for the safety function is once per month.

Calculation basis

B _{10D}	230000 (At 3 A AC15)
d _{op}	365.25 Days
h _{op}	24 h
t _{Cycle}	3600 s

Safety parameters in accordance with EN IEC 62061

SIL 3 (for delayed contacts SIL 2)

For applications in SIL 3 the required demand rate for the safety function is once per month.

5 Safety regulations and installation notes



WARNING: Death, serious personal injury or damage to equipment

Depending on the application, incorrect handling of the device may pose serious risks for the user or cause damage to equipment.

- Observe all the safety notes and warning instructions provided in this chapter and elsewhere in this document.

General

- Observe the safety regulations of electrical engineering and industrial safety and liability associations.

Disregarding these safety regulations may result in death, serious personal injury or damage to equipment.

- Only use power supply units with safe isolation and SELV/PELV.

Startup, mounting, and modifications

Startup, mounting, modifications, and upgrades may only be carried out by qualified personnel.

- Before working on the device, disconnect the power.
- Carry out wiring according to the application. Refer to the "Application examples" section for this.

Reliable operation is only ensured if the device is installed in housing protected from dust and humidity.

- Install the device in housing protected from dust and humidity (min. IP54).

In operation

During operation, parts of electrical switching devices carry hazardous voltages.

- Protective covers must not be removed when operating electrical switching devices.

For emergency stop applications, automatic startup of the machine can pose serious risks for the user.

- The machine must be prevented from restarting automatically by a higher-level controller.

With the manual, monitored reset device, a machine start may not be triggered in accordance with EN ISO 13849-1.

Inductive loads can lead to welded relay contacts.

- Connect a suitable and effective protective circuit to inductive loads.
- Implement the protective circuit parallel to the load and not parallel to the switch contact.

Noise emission may occur when operating relay modules. Wireless reception may be disrupted in residential areas.

The device is a Class A product.

- Observe the requirements for noise emission for electrical and electronic equipment (EN 61000-6-4).
- Implement appropriate precautions against noise emission.

Surge voltages can destroy the device.

- Make sure that the output voltage of the voltage supply does not exceed 37 V even in the event of error.

Faulty devices

The devices may be damaged following an error. Correct operation can no longer be ensured.

- In the event of an error, replace the device.

Only the manufacturer or their authorized representative may perform the following activities. Otherwise the warranty is invalidated.

- Repairs to the device
- Opening the housing

Taking out of service and disposal

- At the end of its service life, dispose of the device in accordance with the applicable environmental regulations.
- Make sure that the device can never be reused.

6 Function description

6.1 Single-channel sensor circuit

The sensor circuit is not designed with redundancy.

The safety relay does not detect short and cross-circuits in the sensor circuit.

6.2 Two-channel sensor circuit

The sensor circuit is designed with redundancy.

Depending on the wiring, the safety relay has cross-circuit detection.

With the corresponding wiring, the safety relay detects short and cross-circuits in the sensor circuit.

6.3 Automatic start

The device starts automatically after the sensor circuit has been closed.

6.4 Manual, monitored start

The device starts with closed sensor circuit once the start circuit has been closed by pressing the reset button.

A connected reset button (connected to S33/S34) is monitored.

6.5 Safe shutdown

When the sensor circuit is opened, the enabling current paths 13/14, 23/24, and 33/34 open without delay.

The enabling current paths 57/58 and 67/68 open after the delay time has elapsed.

When the enabling current paths are open, the device is in the safe state.

The signaling current path closes.

6.6 Off delay

The enabling current paths 57/58 and 67/68 drop out after the set delay time has elapsed (stop category 1).

Use the rotary switch and DIP switch on the device to set the delay time in 24 increments from 0.2 s to 300 s.




See Section "Configuration".

7 Function and time diagrams

7.1 Time diagram for automatic start, two-channel control


- Cross-circuit detection activated

Figure 1 Time diagram for automatic start, two-channel control

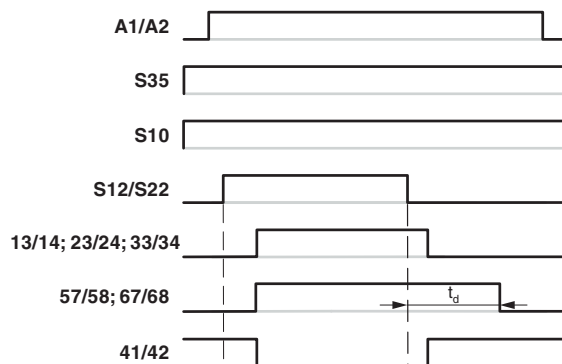

7.2 Time diagram for manual start, single-channel control


Figure 2 Time diagram for manual start, single-channel control

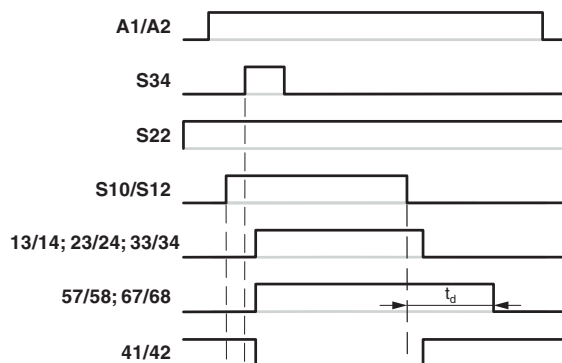

Key:

A1/A2	Power supply
S34	Start circuit
S35	Start circuit
S10/S12/S22	Input sensor circuit
13/14, 23/24, 33/34	Undelayed enabling current paths
57/58, 67/68	Delayed enabling current paths
41/42	Signaling current path, undelayed
t_d	Delay time

8 Block diagram

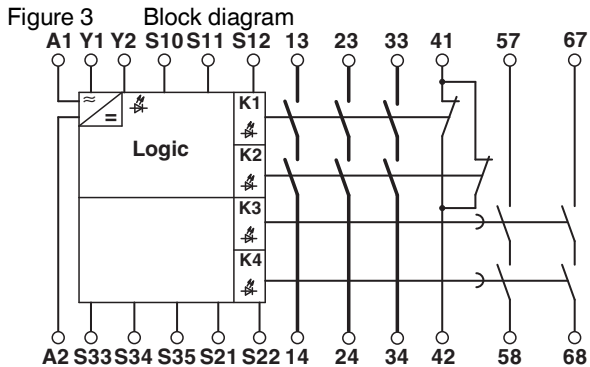

Key:

A1	24 V DC power supply
A2	0 V power supply
S33, S34, S35	Start and feedback circuit
Y1/Y2	Feedback circuit
S10, S12	Input sensor circuit
S11	Output 24 V
S21	Output 0 V
S22	Input sensor circuit
13/14, 23/24, 33/34	Undelayed enabling current paths
41/42	Signaling current path
57/58, 67/68	Delayed enabling current paths


9 Derating

9.1 Any mounting position

The derating curve applies for the following conditions:

- Mounting on a DIN rail in any mounting position
- Devices mounted next to each other without spacing


Figure 4 Derating curve - any mounting position, without spacing

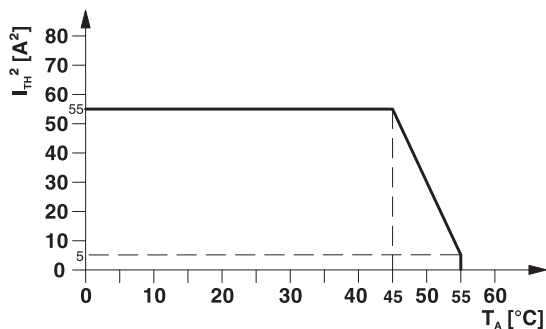

10 Load limit curve

10.1 Ohmic load


Figure 5 Relay load limit curve – resistive load

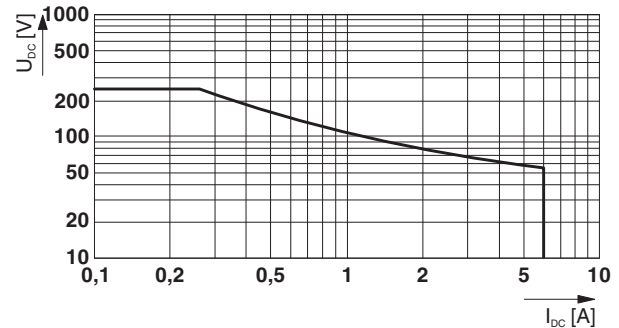

11 Operating and indication elements


11.1 Connection versions

Figure 6 Connection versions

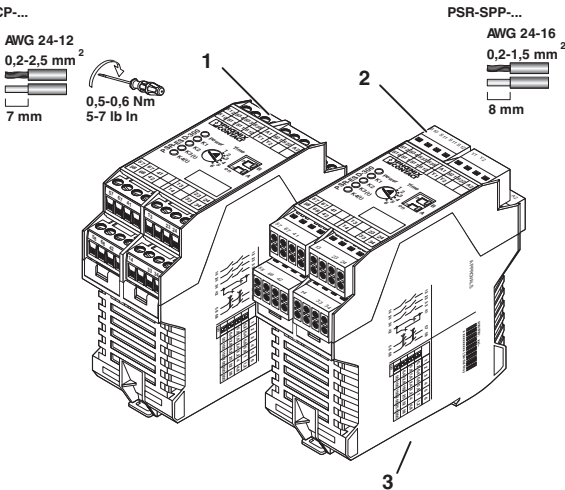

- 1 COMBICON plug-in screw terminal block
- 2 Pluggable COMBICON Push-in terminal block
- 3 Metal lock for fixing to DIN rail

11.2 Connection assignment

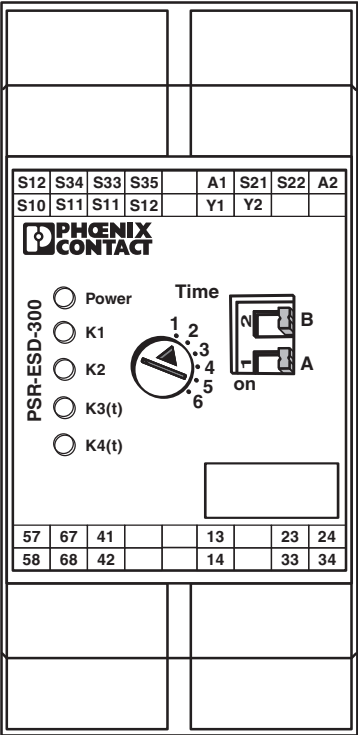


- S10, S12** Input sensor circuit
- S33, S34, S35** Start and feedback circuit
- S11** Output 24 V
- A1** 24 V DC power supply
- S21** Output 0 V
- S22** Input sensor circuit
- A2** 0 V power supply
- Y1/Y2** Feedback circuit
- Power** Power, LED (green)
- K1** Status indicator safety circuit, LED (green)
- K2** Status indicator safety circuit, LED (green)
- K3(t)** Status indicator safety circuit, LED (green)
- K4(t)** Status indicator safety circuit, LED (green)
- 57/58** Delayed enabling current paths
- 67/68** Signaling current path, undelayed
- 41/42** Signaling current path, undelayed
- 13/14** Undelayed enabling current paths
- 23/24** Undelayed enabling current paths
- 33/34** Undelayed enabling current paths

12 Mounting and removing

- Mount the device on a 35 mm DIN rail in accordance with EN 60715.
- To remove the device, use a screwdriver to release the snap-on foot.

Figure 7 Mounting and removing

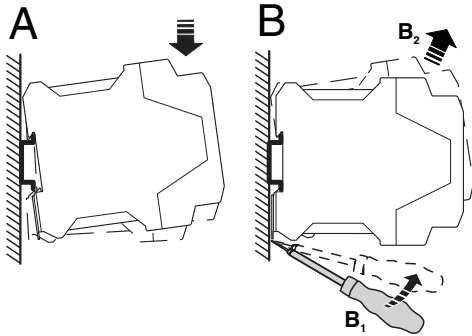

13 Wiring

- Connect the cables to the connection terminal blocks using a screwdriver.

Figure 8 Connecting the cables for PSR-SCP-... (Screw terminal block)


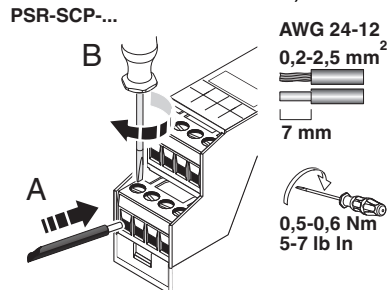


Figure 9 Connecting the cables for PSR-SPP-... (Push-in terminal block)



It is recommended that ferrules are used to connect stranded cables.

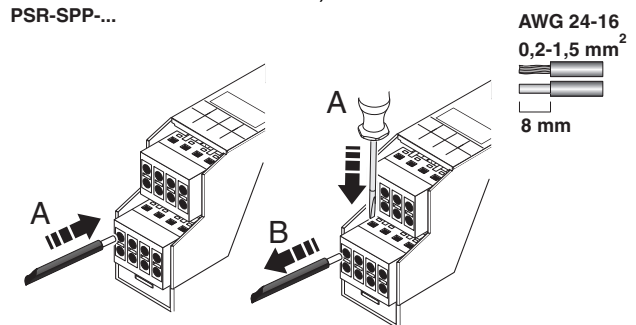


For compliance with UL approval, use copper wire that is approved up to 60°C/75°C.

13.1 Signal generator connection versions

- Connect suitable signal generators to S10/S11/S12 and S21/S22.

Figure 10 Signal generator connection versions

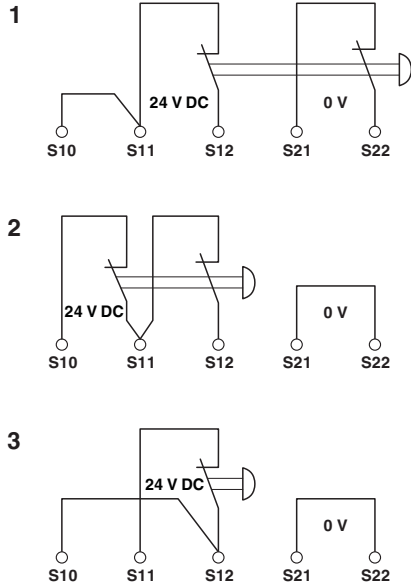

- Two-channel connection with cross-circuit monitoring
- Two-channel connection without cross-circuit monitoring
- Single-channel connection

13.2 Start and feedback circuit connection variants

Automatic start

- Bridge contacts S33/S35 as well as Y1/Y2.

Manual, monitored start


- Connect a reset button to contacts S33/S34.
- Bridge contacts Y1/Y2.

A connected reset button is monitored.

Start and feedback circuit

- Place the relevant N/C contact in feedback circuit Y1/Y2 or in path S33/S34 or S33/S35 to monitor external contactors or extension devices with force-guided contacts.

Figure 11 Start and feedback circuit connection variants

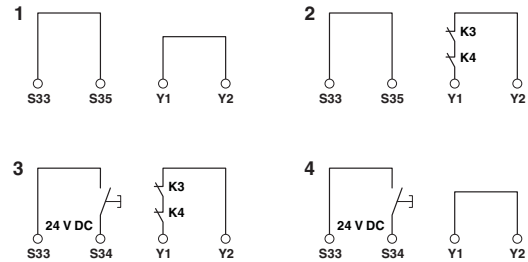

- Automatic start
- Automatic start with monitored contact extension
- Manual, monitored start with monitored contact extension
- Manual, monitored start

14 Startup

- Apply the rated control circuit supply voltage (24 V DC) at terminal blocks A1/A2.

The Power LED lights up.

- Close contacts S10/S11/S12 and S21/S22

Automatic start

The enabling current paths 13/14, 23/24, 33/34 as well as 57/58, 67/68 close.

Signaling current path 41/42 opens.

The K1, K2, K3(t) and K43(t) LEDs light up.

Manual, monitored start

- Press the reset button.

The enabling current paths 13/14, 23/24, 33/34 as well as 57/58, 67/68 close.

Signaling current path 41/42 opens.

The K1, K2, K3(t) and K43(t) LEDs light up.

15 Configuration

15.1 Setting the delay time

Use the rotary switch and DIP switch on the device to set the delay time in 24 increments from 0.2 s to 300 s.

The 24 increments are the result of four periods (DIP switch), each with six delay times (rotary switch), see figure.

To configure the safety relay, proceed as follows:

1. Set a time period using the DIP switches.
2. Set the desired delay time with the rotary switch.

Figure 12 Configuration of the delay time (in seconds)

		1	2	3	4	5	6
	B A	0,2	0,4	0,6	0,8	1	1,2
	B A	0,8	1,6	2,4	3,2	4	4,8
	B A	6,4	12,8	19,2	25	32	38
	B A	50	100	150	200	250	300
on							



WARNING: Danger due to incorrect setting.

An incorrect configuration can result in dangerous machine or system states.


- Check the configuration before starting up for the first time.

15.2 Protection against manipulation

Once the time has been set, the rotary switch and the DIP switch can be protected against manipulation by covering with the label provided.

Operate the device in a locked control cabinet to protect the configuration against tampering.

Figure 13 Applying the label

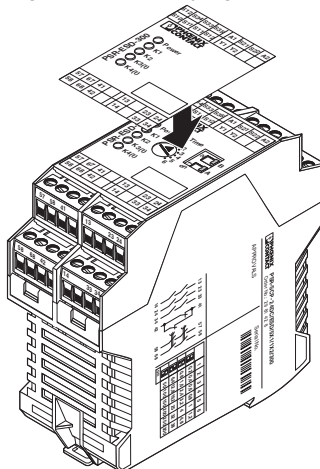

16 Calculating the power dissipation



The total power dissipation of the safety relay is based on the input power dissipation and the contact power dissipation for the same and for different load currents.

Input power dissipation

$$P_{\text{Input}} = U_B^2 / (U_S / I_S)$$

Contact power dissipation

With the same load currents:

$$P_{\text{Contact}} = n \cdot I_L^2 \cdot 200 \text{ m}\Omega$$

With different load currents:

$$P_{\text{Contact}} = (I_{L1}^2 + I_{L2}^2 + \dots + I_{Ln}^2) \cdot 200 \text{ m}\Omega$$

Total power dissipation

$$P_{\text{Total}} = P_{\text{Input}} + P_{\text{Contact}}$$

therefore

$$P_{\text{Total}} = U_B^2 / (U_S / I_S) + n \cdot I_L^2 \cdot 200 \text{ m}\Omega$$

or

$$P_{\text{Total}} = U_B^2 / (U_S / I_S) + (I_{L1}^2 + I_{L2}^2 + \dots + I_{Ln}^2) \cdot 200 \text{ m}\Omega$$

Key:

- P** Power dissipation in mW
- U_B** Applied operating voltage
- U_S** Rated control circuit supply voltage
- I_S** Rated control supply current
- n** Number of enabling current paths used
- I_L** Contact load current

17 Function test/proof test



Use the function test to test the safety function. To do this, request the safety function once by pressing the emergency stop button, for example. Check whether the safety function is executed correctly by then switching the device on again via the sensor circuits.

18 Application examples


18.1 Single-channel emergency stop monitoring

- Manual, monitored start
- Monitoring of external, force-guided contactors
- Suitable up to category 1, PL c (EN ISO 13849-1), SIL 1 (EN IEC 62061)



Contactor K4 is not essential in order to achieve category 1.

Figure 14 Single-channel emergency stop monitoring/manual, monitored start

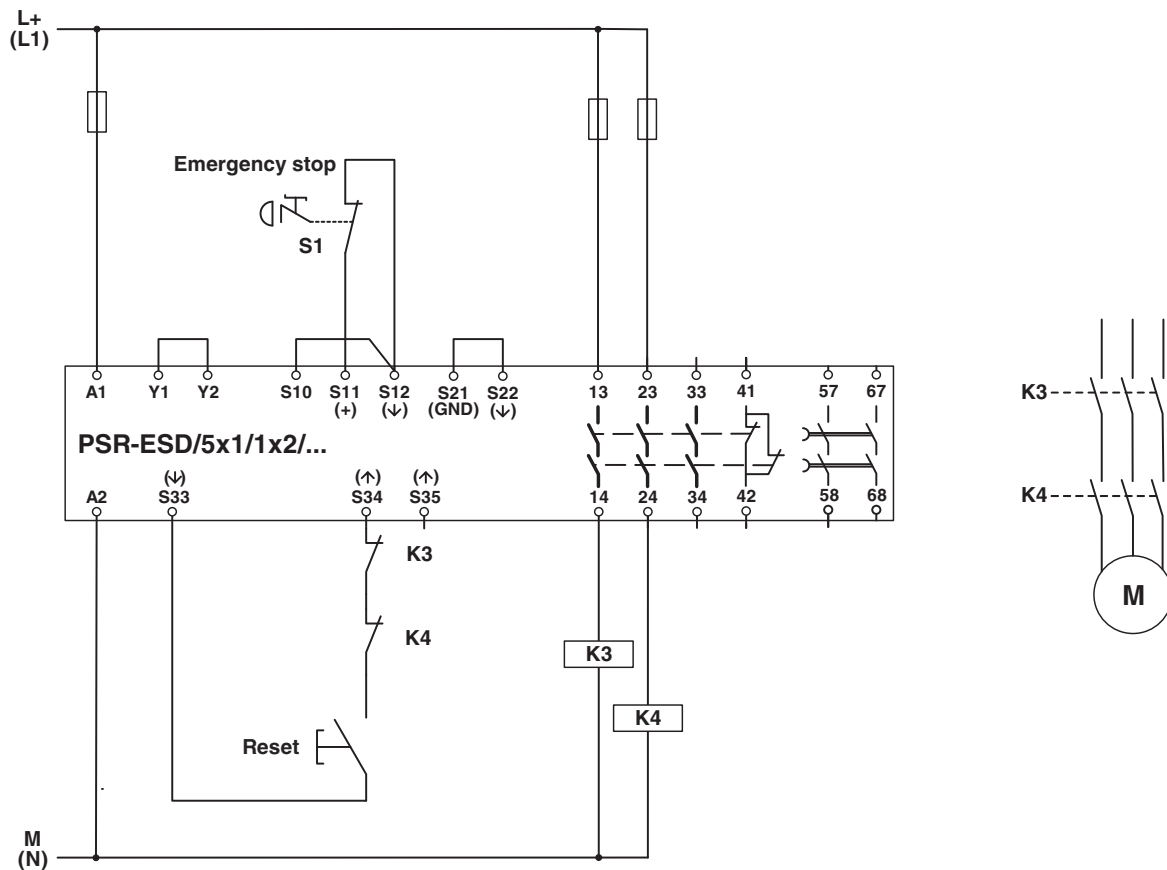


Key:

- S1** Emergency stop button
K3/K4 Force-guided contactors

18.2 Two-channel emergency stop monitoring

- Manual, monitored start
- Cross circuiting detection
- Monitoring of external, force-guided contactors
- Suitable up to category 4, PL e (EN ISO 13849-1), SIL 3 (EN IEC 62061)

Figure 15 Emergency stop monitoring/manual, monitored start

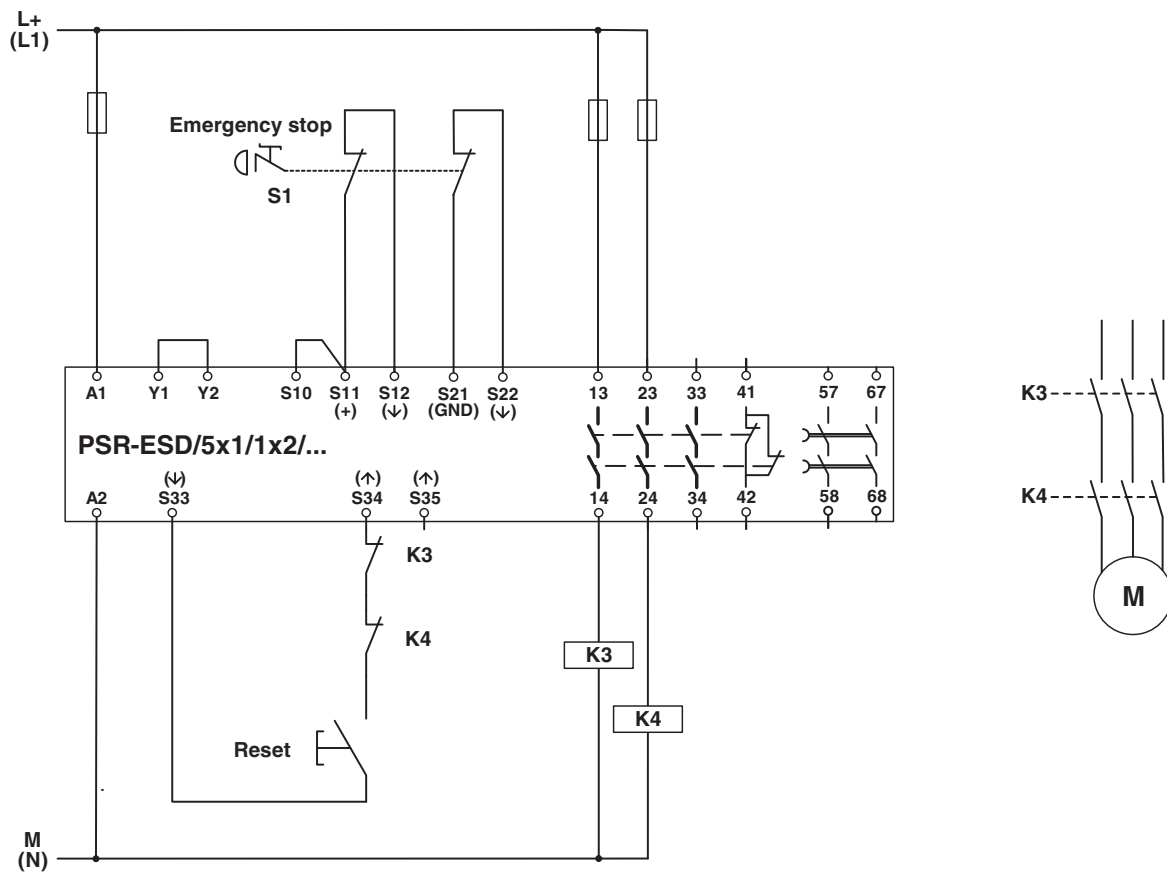


Key:

- S1** Emergency stop button
K3/K4 Force-guided contactors

18.3 Two-channel safety door monitoring

- Manual, monitored start
- Cross circuiting detection
- Monitoring of external, force-guided contactors
- Suitable up to category 4, PL e (EN ISO 13849-1), SIL 3 (EN IEC 62061)

Figure 16 Safety door monitoring/manual, monitored start

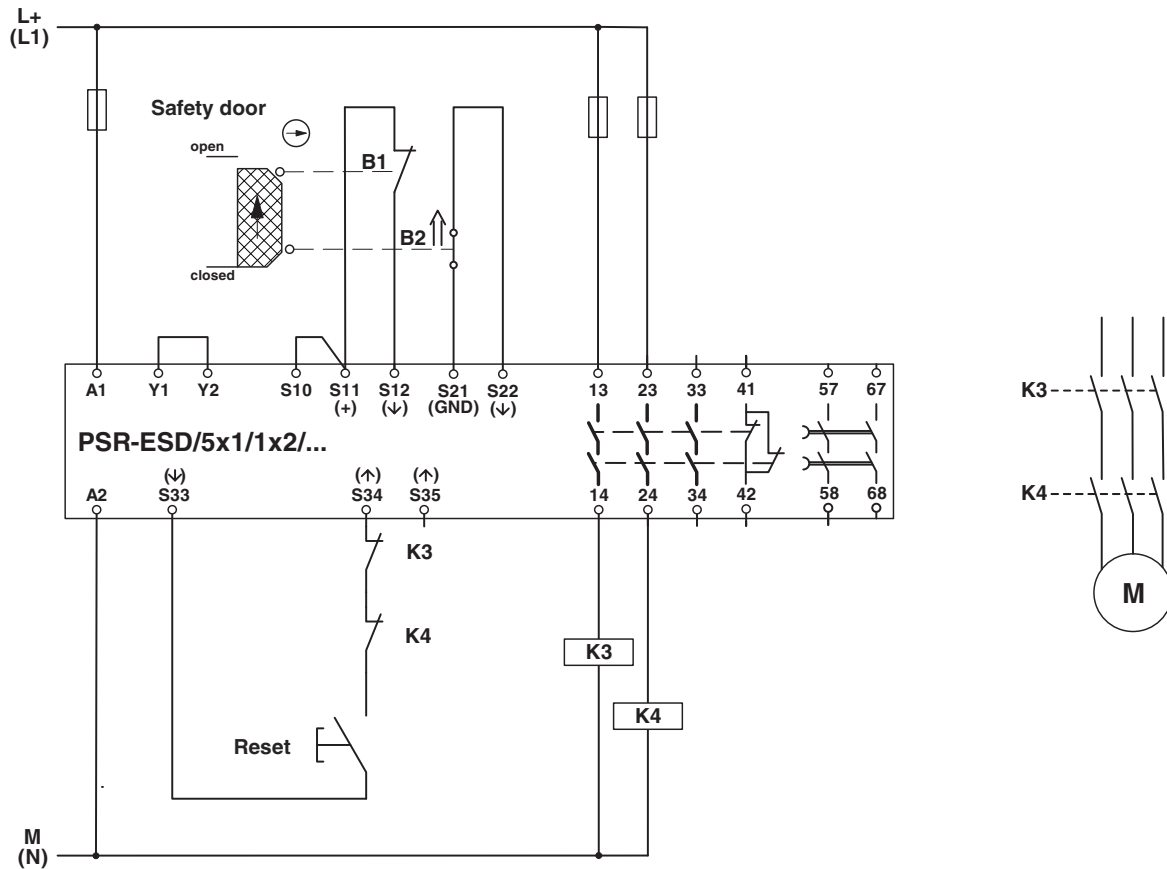


Key:

- B1/B2** Mechanical safety door switches
K3/K4 Force-guided contactors

18.4 Light grid monitoring/automatic start

- Automatic start
- Cross-circuit detection via light grid
- Monitoring of external, force-guided contactors
- Suitable up to category 4, PL e (EN ISO 13849-1), SIL 3 (EN IEC 62061)

Figure 17 Light grid monitoring/automatic start

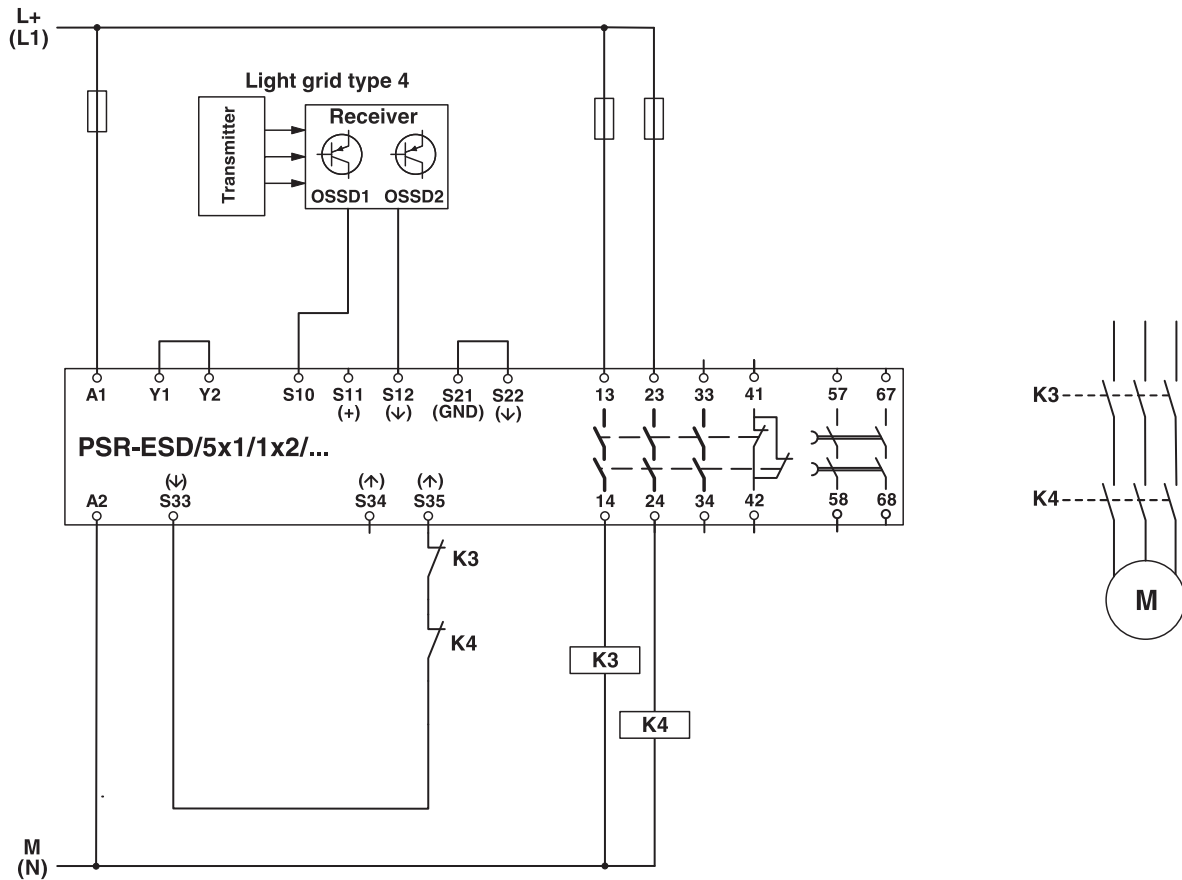

Key:

K3/K4 Force-guided contactors

19 Attachment

19.1 Using PSR devices at altitudes greater than 2000 m above sea level



The following section describes the special conditions for using PSR devices at altitudes greater than 2000 m above sea level. Observe the relevant device-specific data (technical data, derating, etc.) according to the product documentation for the individual device.

Using the device at altitudes **greater than 2000 m above sea level up to max. 4500 m above sea level** is possible under the following conditions:

1. Limit the rated control circuit supply voltage (U_S) in accordance with the table below. Observe the technical data for the device.

U_S according to the technical data for the device	U_S when used at altitudes greater than 2000 m above sea level
< 150 V AC/DC	U_S according to the technical data for the device still valid
> 150 V AC/DC	Limited to max. 150 V AC/DC

1. Limit the maximum switching voltage in accordance with the table below. Observe the technical data for the device.

Max. switching voltage according to the technical data for the device	Max. switching voltage when used at altitudes greater than 2000 m above sea level
< 150 V AC/DC	Max. switching voltage according to the technical data for the device still valid
> 150 V AC/DC	Limited to max. 150 V AC/DC

1. Reduce the maximum ambient temperature for operation by the corresponding factor in accordance with the table below.
2. If derating is specified, offset all the points of the derating curve by the corresponding factor in accordance with the table below.

Altitude above sea level	Temperature derating factor
2000 m	1
2500 m	0.953
3000 m	0.906
3500 m	0.859
4000 m	0.813
4500 m	0.766

Example calculation for 3000 m




The following calculation and the illustrated derating curve are provided as examples. Perform the actual calculation and offset the derating curve for the device used according to the technical data and the “Derating” section.

$$27\text{ °C} \cdot 0.906 \approx 24\text{ °C}$$

$$55\text{ °C} \cdot 0.906 \approx 49\text{ °C}$$

Figure 18 Example of a suspended derating curve (red)

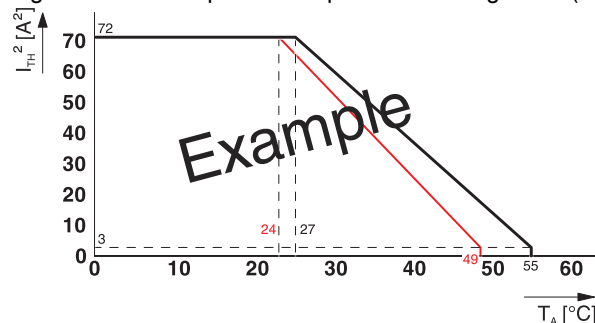

19.2 Revision history

Version	Date	Contents
04	2016-02-04	New edition of the data sheet
05	2023-10-17	Designation of standard EN IEC 62061 updated; SILCL changed to SIL; application manual for PSR safety relays removed from ordering data; information about disposal at end of service life added to safety regulations and installation notes; Technical data section: standard specification for relay type updated, standard specification for air clearances and creepage distances updated, data added: weight, device type, HFT, information about SIL 3 according to EN IEC 62061; Diagnostics section removed