



Parker Hannifin Corporation
Instrumentation Products Division
1005 A Cleaner Way
Huntsville, AL 35805 USA
Phone: +1 (256) 881-2040
Fax: +1 (256) 881-5072
Email: c-parker@parker.com
Website: www.parker.com

[All Categories](#) > [High Pressure Fittings and Tubing](#) > [P Series Pipe Fittings](#) > [Pipe Check Valves](#) > [Pipe Ball Check Valves](#) >
[Item # CPB4400](#)



ITEM # CPB4400, PIPE BALL CHECK VALVES

Prevents reverse flow where **leak-tight shut-off is not mandatory**. When differential drops below cracking pressure, valve closes. With all-metal components, valve can be used up to 400°F (204°C). See Technical Information section for connection temperature limitations. (Not for use as a relief valve.)

Ball and poppet are an integral design to assure positive, in-line seating without “chatter”. Poppet is designed essentially for axial flow with minimum pressure drop.

Materials: 316 Stainless

[more](#)

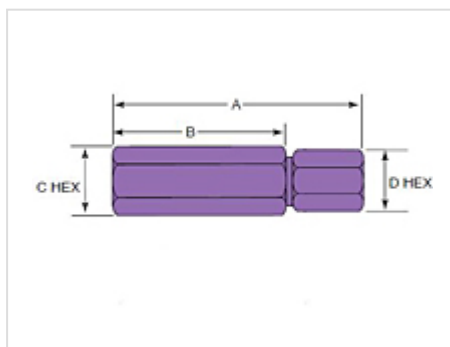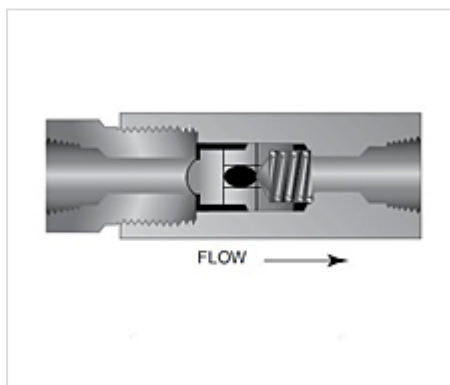

Connection Type	1/4" NPT
Pressure Rating	15.000 psi 1034.20 bar
Minimum Opening	0.12 in 3.05 mm
A - Length	3.37 in 85.60 mm
B - Length	2.38 in 60.33 mm
C - Typical Hex	0.81 in 20.57 mm
D - Typical Hex	0.81 in 20.57 mm
Rated C _v	0.28